

Vintage door



Double Fold Crochet Edge Bias Tape



vintagedoor.etsy.com





MITERED CORNER TUTORIAL


© Vintagedoor 2016. All Rights Reserved.

1. Unfold the bias tape


Note: The length of your bias tape will be determined by your project needs. It is not necessary to unfold the entire length at once. You can unfold as you go.



Right Side Up



Right Side Down



↑
Leave 3 to 4 inches excess.

2. Place bias tape Right Sides Together with the top raw edge of your quilt. Start sewing 3 to 4 inches from the top left corner. Sew in the top gutter/fold closest to the top edge of the quilt.

Stop 1/4 inch before the edge of the quilt.

Stitch off at a 45 degree angle as shown.

Remove quilt from the sewing machine.




3. Fold the bias tape over itself making a 90 degree angle out of the bias tape.

The folded bias at the corner should be Wrong Sides Together with itself.

Finger press the corner (or press the corner with an iron).

You will have a corner "flap." Make sure the folded edge of bias tape lines up perfectly with the top raw edge of the quilt and "flaps" over the previously sewn area - avoiding the next area to be sewn.



Start 1/4 inch down from the top.


4. Fold the bias tape in the opposite direction.

You should end up with the bias tape Right Sides Together with the quilt again.


Start 1/4 inch down from the top edge. Sew in the outer gutter/fold closest to the raw edge of the quilt.

Stop 1/4 inch before the bottom of the quilt.


Stitch off at a 45 degree angle as shown, remove from machine.

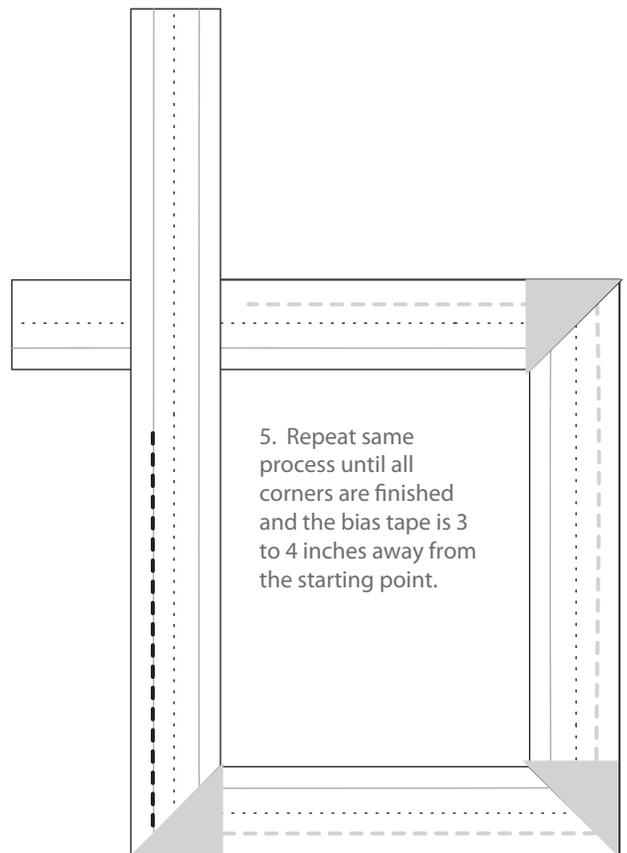

5. Repeat same process until all corners are finished and the bias tape is 3 to 4 inches away from the starting point.

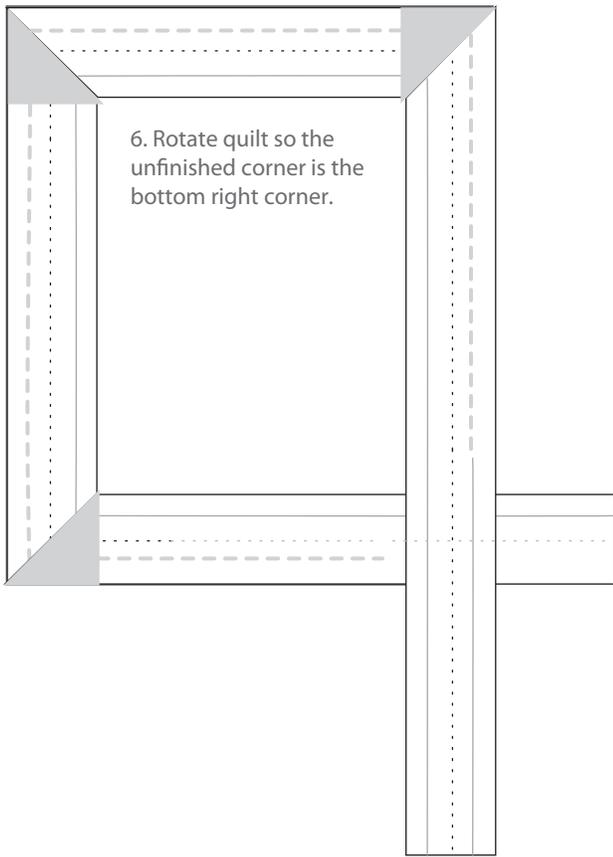

6. Rotate quilt so the unfinished corner is the bottom right corner.

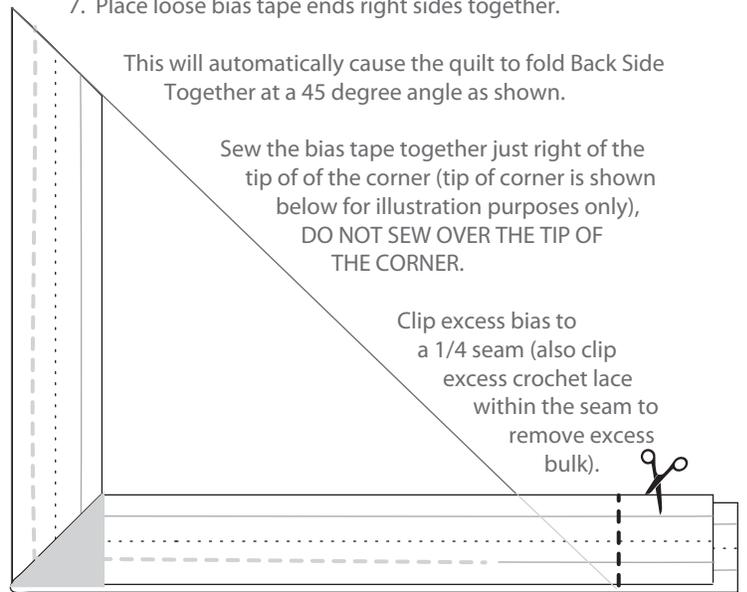


7. Place loose bias tape ends right sides together.


This will automatically cause the quilt to fold Back Side Together at a 45 degree angle as shown.

Sew the bias tape together just right of the tip of of the corner (tip of corner is shown below for illustration purposes only), **DO NOT SEW OVER THE TIP OF THE CORNER.**


Clip excess bias to a 1/4 seam (also clip excess crochet lace within the seam to remove excess bulk).

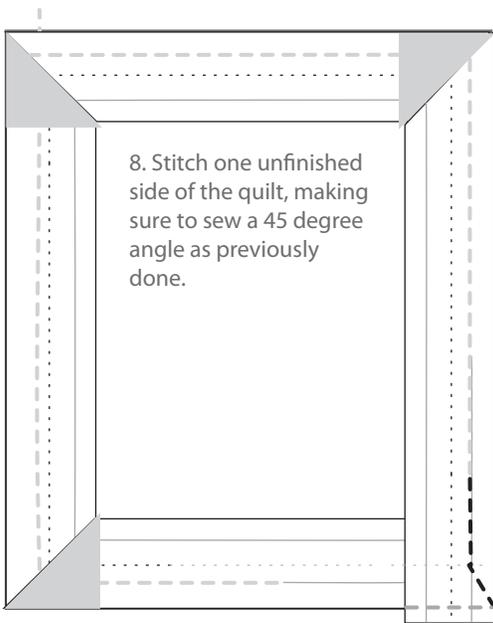

8. Stitch one unfinished side of the quilt, making sure to sew a 45 degree angle as previously done.

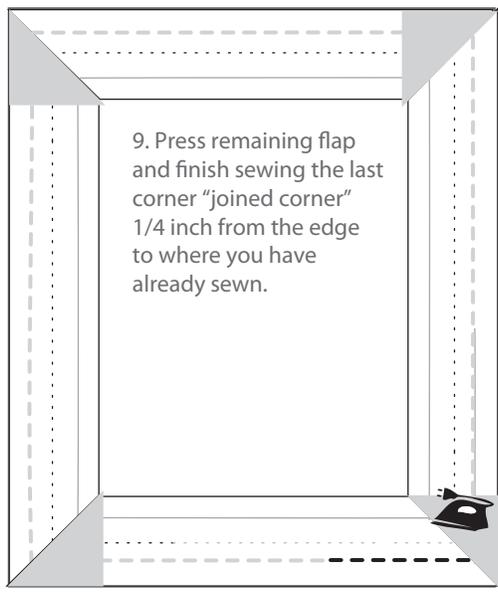

9. Press remaining flap and finish sewing the last corner "joined corner" 1/4 inch from the edge to where you have already sewn.

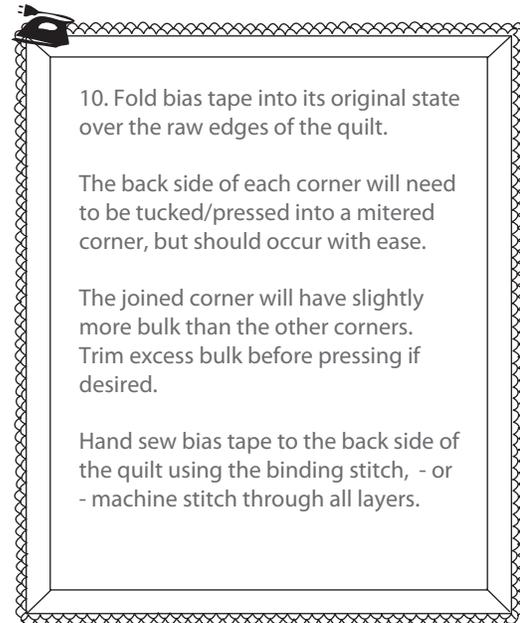


10. Fold bias tape into its original state over the raw edges of the quilt.

The back side of each corner will need to be tucked/pressed into a mitered corner, but should occur with ease.

The joined corner will have slightly more bulk than the other corners. Trim excess bulk before pressing if desired.

Hand sew bias tape to the back side of the quilt using the binding stitch, - or - machine stitch through all layers.

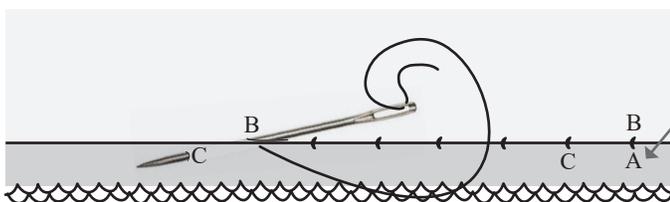

Binding Stitch

Tie a knot and bring your needle up at point A.

Take the needle over the binding and down into the quilt at point B. Come back up through the binding at point C. Point C becomes a new point A.

Do not sew through all layers of the quilt.